


HENDERSON COUNTY
PINE STREET PARKING IMPROVEMENTS

HENDERSONVILLE
HENDERSON COUNTY
NORTH CAROLINA

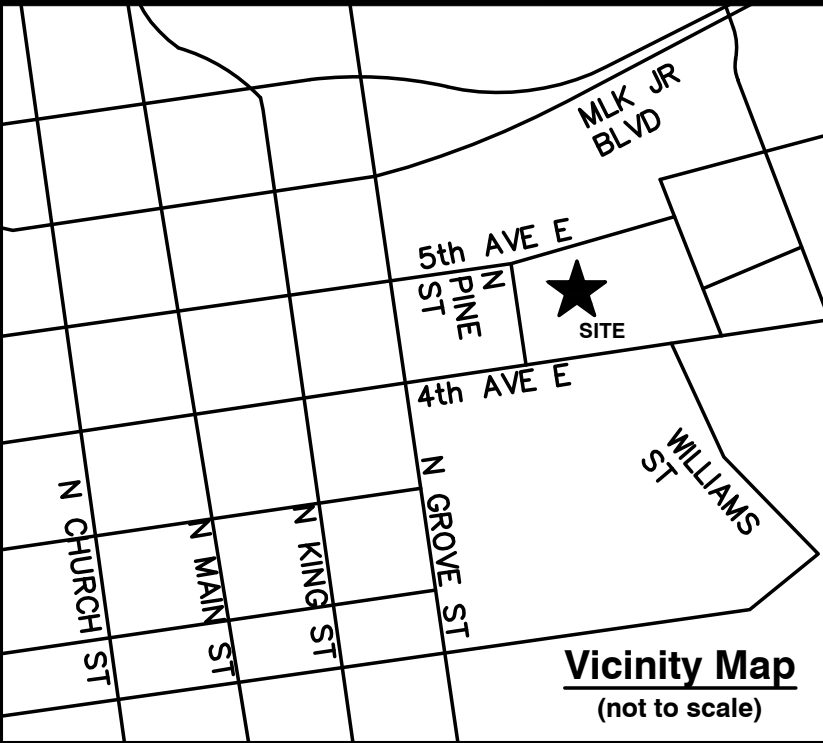

WGLA
Engineering

WGLA ENGINEERING, PLLC
724 5th AVENUE WEST
HENDERSONVILLE, NC 28739
(828) 687-7177
WGLA.COM
NC LICENSE P-1342

PINE STREET
PARKING LOT

HENDERSONVILLE
HENDERSON COUNTY
NORTH CAROLINA



DocuSigned by:
Jared L. Deridder

NOT A PROFESSIONAL SEAL
041349
ENGINEER
JARED L. DERIDDER

7/14/2026

REVISIONS	
DATE	DESCRIPTION

811

Know what's below.
Call before you dig.

PROJECT NUMBER: 25184
DATE: 7-14-26



COVER

SCALE: AS NOTED

DEVELOPMENT BLOCK

PROJECT: PINE STREET PARKING IMPROVEMENTS
ADDRESS: 420 N PINE ST HENDERSONVILLE, NC 28792
PIN/OWNER: 9568-98-1450
YOUNGBLOOD OIL CO INC; AMOCO
PO BOX 2590
HENDERSONVILLE NC, 28793
9568-98-1526
KENNETH YOUNGBLOOD TRUSTEE
KATHERINE W YOUNGBLOOD
PO BOX 97 FLETCHER NC 28732
PROJECT CONTACT: BRYAN RHODES
HENDERSON COUNTY
CAPITAL PROJECTS DIRECTOR
100 N. KING STREET
HENDERSONVILLE, NC 28792
(828) 694-6554
ENGINEER: JARED L. DERIDDER, P.E.
WGLA ENGINEERING, PLLC
724 5TH AVENUE WEST
HENDERSONVILLE NC 28739
(828) 687-7177
SURVEYOR: ASSOCIATED LAND SURVEYORS
AND PLANNERS PC.
PO BOX 578
HORSE SHOE, NC 28742
828-890-3507
ZONING: C-2 SECONDARY BUSINESS

SHEET INDEX

SHEET NO.	DESCRIPTION
C-100	EXISTING CONDITIONS AND DEMOLITION PLAN
C-200	SITE PLAN
C-700	SITE DETAILS



SOUTHERN AGRI INSECTICIDES INC
PIN #9568-98-0757

5TH AVENUE EAST
(PUBLIC R/W UNKNOWN)

200' RR RIGHT OF WAY

RIVER NORTH, LLC
PIN #9568-88-9576

KENNETH YOUNGBLOOD TRUSTEE
KATHERINE W YOUNGBLOOD
PIN #9568-98-1526

NELSON AND COMPANY
PIN #9568-98-5554

EXISTING BUILDING
TO REMAIN

EXISTING GRAVEL
LOT TO REMAIN

EXISTING STORM DRAIN
TO REMAIN

EXISTING OVERHEAD UTILITY
POLE TO REMAIN

EXISTING WATER METER
TO REMAIN

EXISTING PROPERTY BOUNDARY (TYP)

EXISTING RAILROAD
TRACKS (TYP)

N PINE STREET
(PUBLIC R/W UNKNOWN)

GREY MILL INVESTORS LLC
PIN #9568-89-9541


EXISTING CONCRETE
SLAB TO REMAIN
YOUNGBLOOD OIL CO INC; AMOCO
PIN #9568-98-1450

4TH AVENUE EAST
(40' PUBLIC R/W)

HENDERSON COUNTY
PIN #9568-97-1859

LEGEND:

EXISTING GRAVEL AREA	
EXISTING CONCRETE AREA	

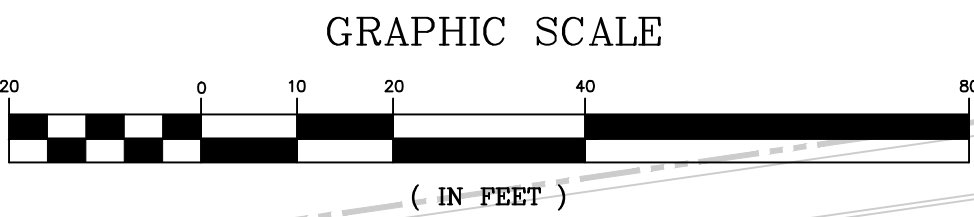

WGLA ENGINEERING, PLLC
724 5th AVENUE WEST
HENDERSONVILLE, NC 28739
(828) 687-7177
WGLA.COM
NC LICENSE P-1342

PINE STREET
PARKING LOT

HENDERSONVILLE
HENDERSON COUNTY
NORTH CAROLINA



DocuSigned by:
Jared L. Deridder
NOTARY PUBLIC
SEAL
041349
JARED L. DERIDDER
7/14/2026

REVISIONS	
DATE	DESCRIPTION




Know what's below.
Call before you dig.

PROJECT NUMBER: 25184
DATE: 7-14-26

EXISTING
CONDITIONS
AND
DEMOLITION PLAN

C-100

SCALE: 1"=20'

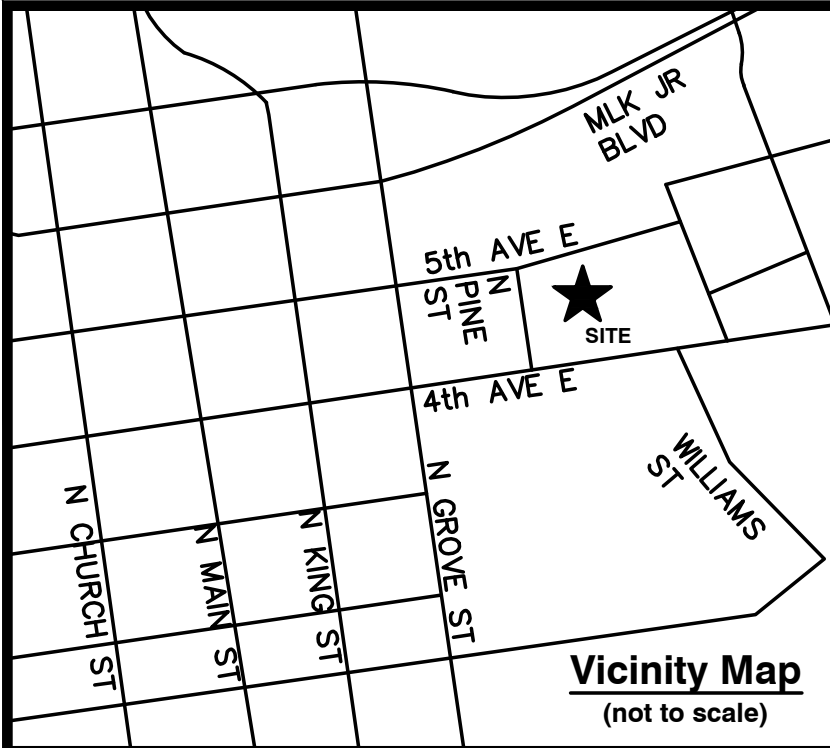

DEVELOPMENT BLOCK

PROJECT: PINE STREET PARKING IMPROVEMENTS
ADDRESS: 420 N PINE ST HENDERSONVILLE, NC 28792
PIN/OWNER: 9568-98-1450
YOUNGBLOOD OIL CO INC; AMOCO
PO BOX 2590
HENDERSONVILLE NC, 28793
9568-98-1526
KENNETH YOUNGBLOOD TRUSTEE
KATHERINE W YOUNGBLOOD
PO BOX 97 FLETCHER NC 28732
PROJECT CONTACT: BRYAN RHODES
HENDERSON COUNTY
CAPITAL PROJECTS DIRECTOR
100 N. KING STREET
HENDERSONVILLE, NC 28792
(828) 694-6554
ENGINEER: JARED L. DERIDDER, P.E.
WGLA ENGINEERING, PLLC
724 5TH AVENUE WEST
HENDERSONVILLE NC 28739
(828) 687-7177
SURVEYOR: ASSOCIATED LAND SURVEYORS
AND PLANNERS PC.
PO BOX 578
HORSE SHOE, NC 28742
828-890-3507
ZONING: C-2 SECONDARY BUSINESS



GENERAL NOTES
1.) ALL DIMENSIONS ARE IN FEET.
2.) NO PORTION OF THIS PROPERTY IS WITHIN THE 100 YEAR
FLOODPLAIN OR FLOODWAY
3.) THIS PARCEL AND ALL ADJOINING PARCELS ARE WITHIN THE CITY
OF HENDERSONVILLE CITY LIMITS.
4.) RECEIVING WATER COURSE:
MUD CREEK (6-55; CLASS C)
FRENCH BROAD RIVER BASIN

PARKING SUMMARY

TOTAL SPACES: 63

LEGEND:

EXISTING GRAVEL AREA	
EXISTING CONCRETE AREA	
PROPOSED GRAVEL IMPROVEMENTS AREA (4" CABC STONE)	
PROPOSED WHEEL STOPS	

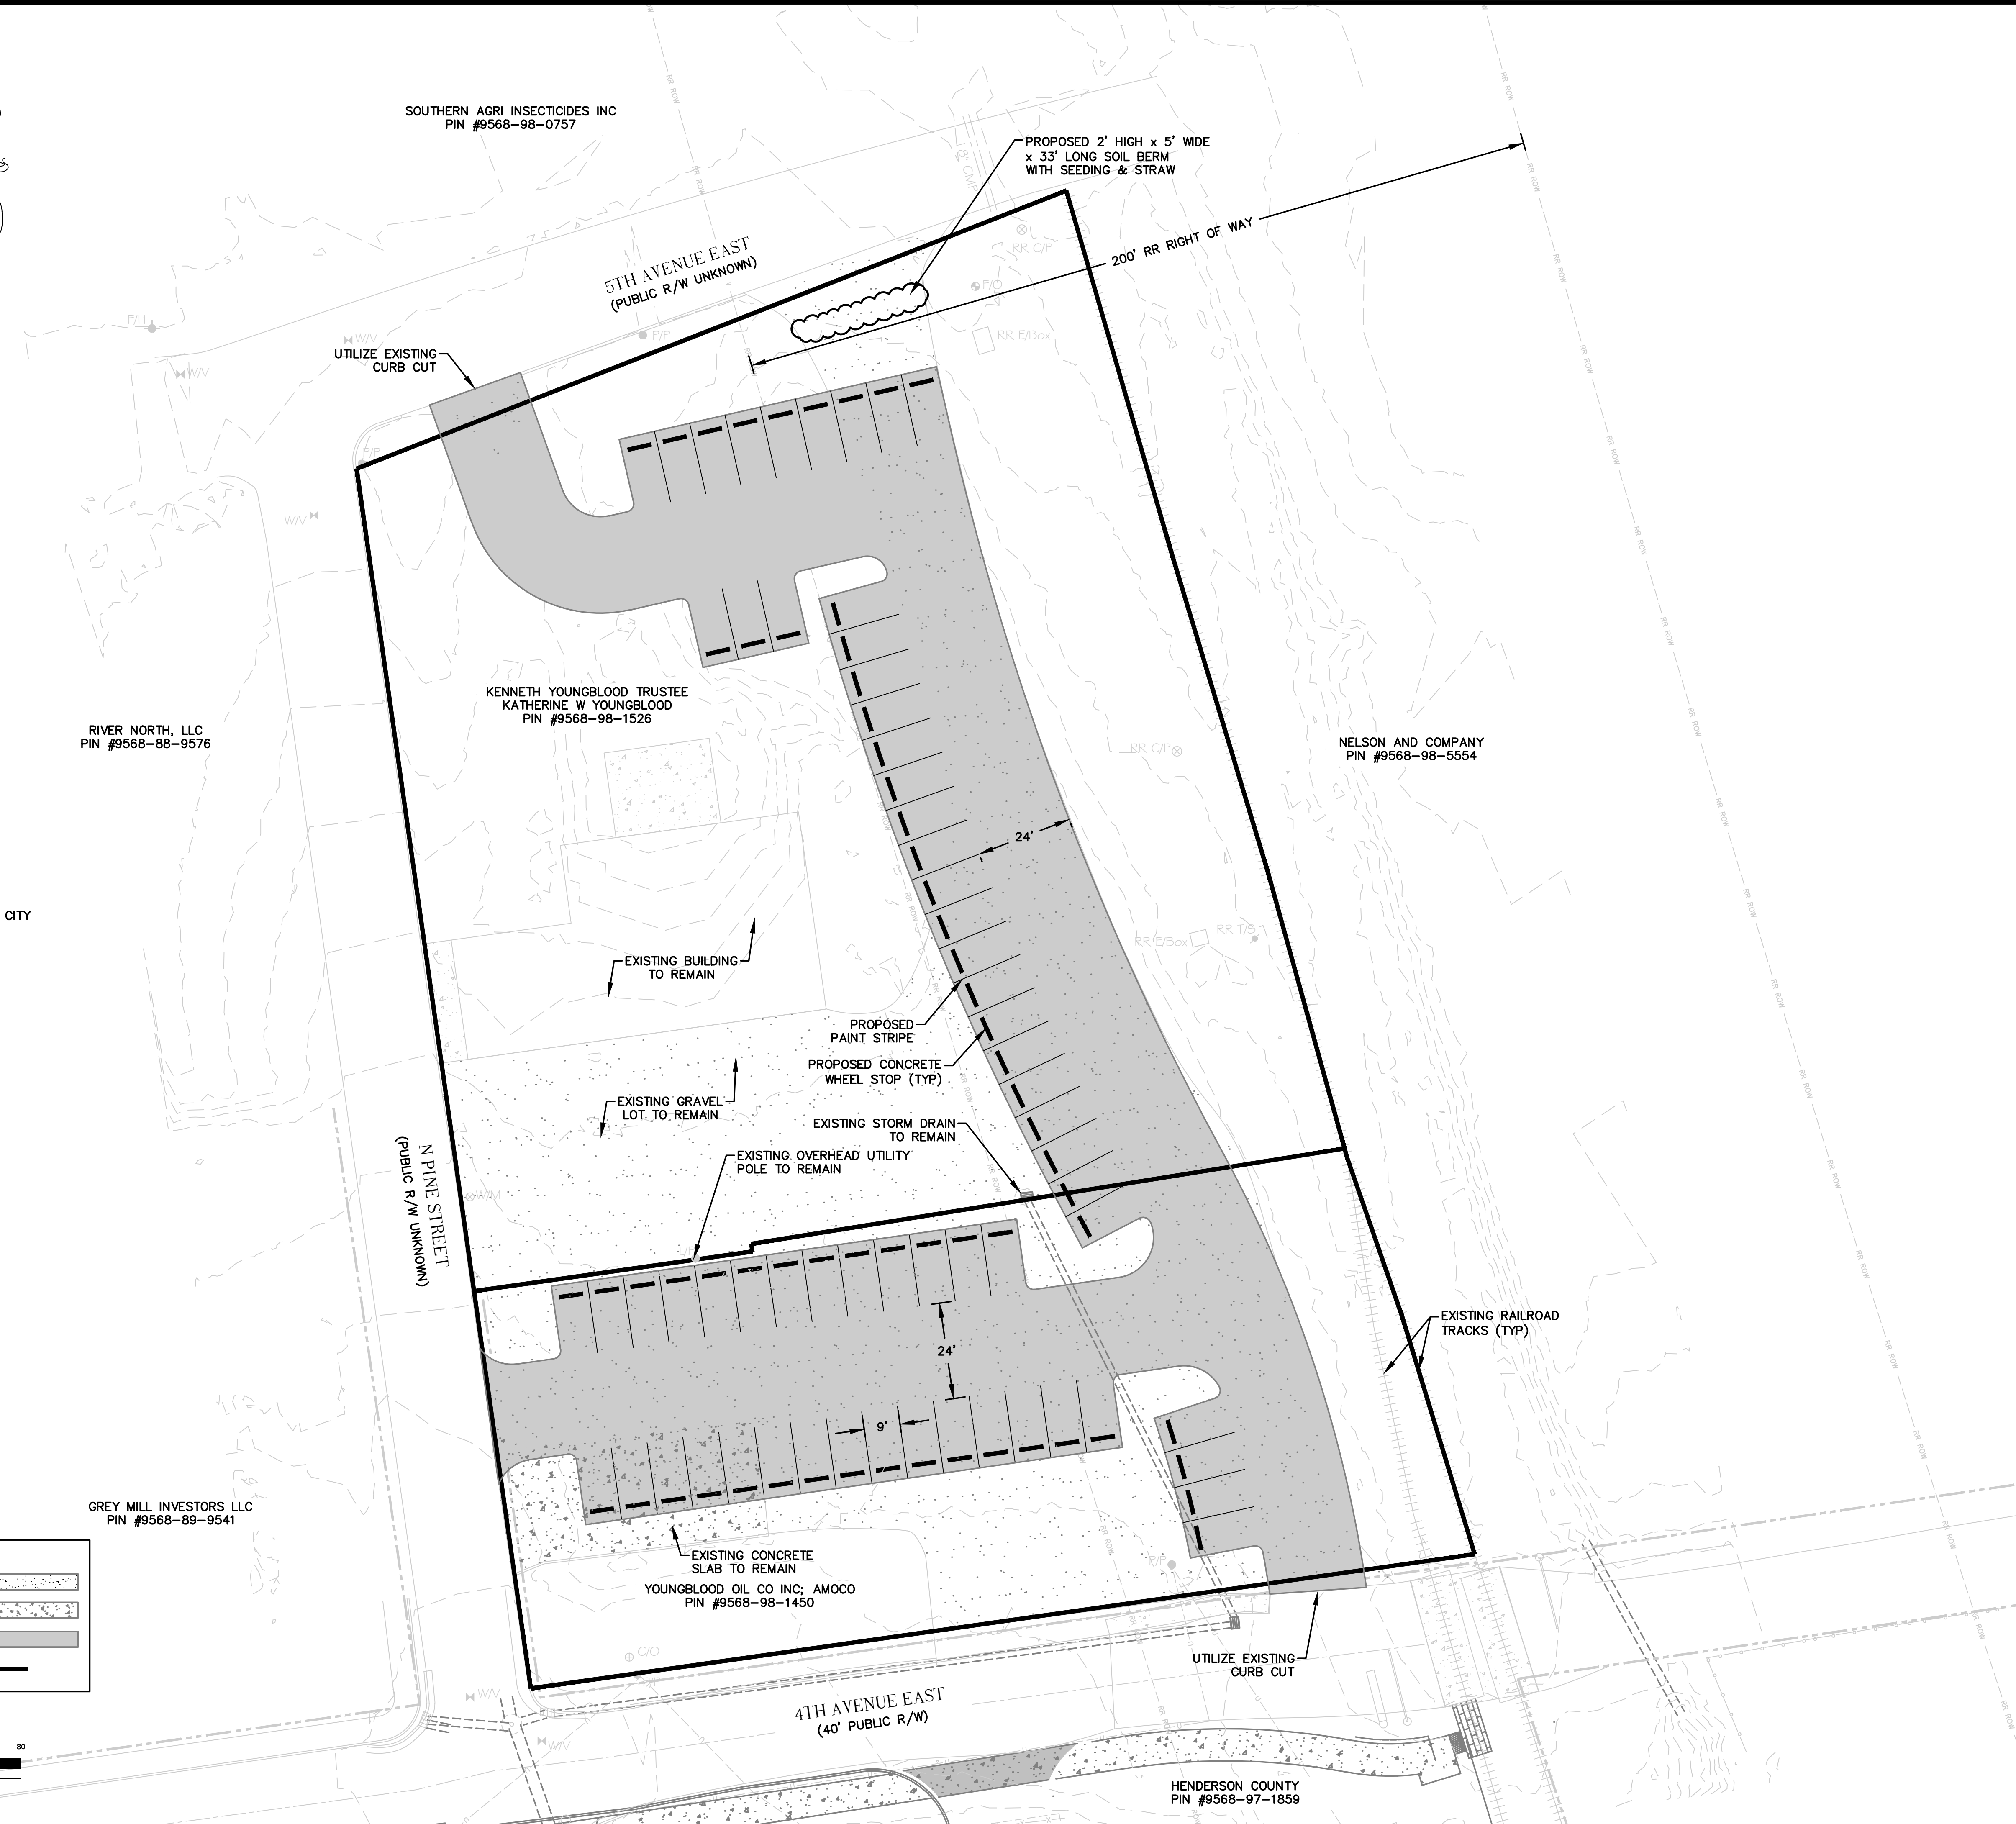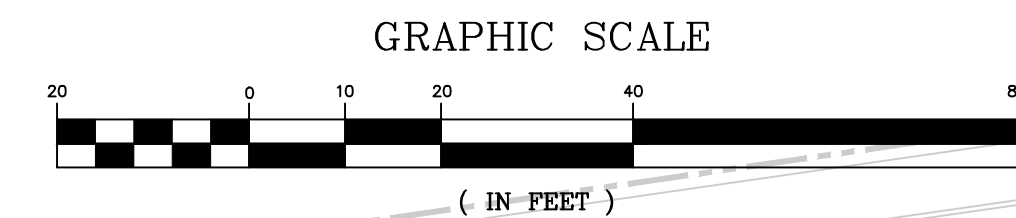

WGLA Engineering

WGLA ENGINEERING, PLLC
724 5th AVENUE WEST
HENDERSONVILLE, NC 28739
(828) 687-7177
WGLA.COM
NC LICENSE P-1342

PINE STREET PARKING LOT

HENDERSONVILLE
HENDERSON COUNTY
NORTH CAROLINA

DocuSigned by:
Jared L. Deridder
Notary Public
Seal 041349
7/14/2026

REVISIONS	
DATE	DESCRIPTION

Know what's below.
Call before you dig.

PROJECT NUMBER: 25184
DATE: 7-14-26

SITE PLAN

C-200

SCALE: 1"=20'

SEEDING SPECIFICATIONS

I. TEMPORARY COVER

A. LIME & FERTILIZER

CONTRACTOR SHALL FURNISH AND APPLY LIME AND FERTILIZER TO THE SOIL AS REQUIRED TO PROVIDE SATISFACTORY CONDITIONS FOR SEED GERMINATION.

A NORTH CAROLINA DEPARTMENT OF AGRICULTURE SOILS TEST OR EQUAL SHALL BE OBTAINED FOR ALL AREAS TO BE SEEDED. RECOMMENDED FERTILIZER AND pH ADJUSTING PRODUCTS SHALL BE INCORPORATED INTO APPLICABLE AREAS BASED ON THE TEST RESULTS.

THESE MATERIALS SHALL BE SPREAD UNIFORMLY OVER THE AREA TO BE PLANTED. THE SOIL SHALL BE TILLED TO A DEPTH OF 3 – 4 INCHES WITH EQUIPMENT APPROVED BY THE ENGINEER.

B. TEMPORARY COVER

SEEDING – CONTRACTOR SHALL SELECT A QUICK GROWING GRASS WITH HIGH SEEDING VIGOR THAT IS SUITED TO THE AREA, THE TIME OF PLANTING, AND THAT WILL NOT INTERFERE WITH PLANT TO BE SOWN LATER FOR PERMANENT COVER.

MAY THROUGH AUGUST
SUNDANGRASS 50 LB / AC
OR GERMAN MILLET 40 LB / AC

SEPT. THROUGH APRIL
RYEGRASS 120 LB / AC

ALL SEEDS SHALL HAVE BEEN TESTED NOT MORE THAN 6 MONTHS PRIOR TO THE DATE OF SEEDING.

CONTRACTOR SHALL APPLY SEED UNIFORMLY BY HAND, CYCLONE SEEDER, DRILL, CULTIPACKER SEEDER, OR HYDRAULICALLY.

A SLURRY MIXTURE OF WATER, FERTILIZER, SEED AND CELLULOSE FIBER MULCH IS ACCEPTABLE ON THIS PROJECT.

C. MULCHING

IN ORDER TO REDUCE DAMAGE FROM WATER RUN-OFF AND IMPROVE MOISTURE CONDITIONS FOR SEEDLINGS, A MULCH MATERIAL SHALL BE FURNISHED WHEN TEMPORARY SEEDING IS TO BE DONE. ACCEPTABLE MATERIALS ARE:

- DRY UNCHOPPED, UNWEATHERED SMALL GRAIN STRAW OR HAY FREE OF SEEDS OF COMPETING PLANTS – 1–2 TONS / ACRE
- WOOD FIBER (EXCELSIOR)
- WOOD CELLULOSE FIBER – 500 LBS / ACRE WITHOUT STRAW
- JUTE MATTING

II. PERMANENT COVER

A. CONTRACTOR SHALL FURNISH AND APPLY

1– A NORTH CAROLINA DEPARTMENT OF AGRICULTURE SOILS TEST OR EQUAL SHALL BE OBTAINED FOR ALL AREAS TO BE SEEDED. RECOMMENDED FERTILIZER AND pH ADJUSTING PRODUCTS SHALL BE INCORPORATED INTO APPLICABLE AREAS BASED ON THE TEST RESULTS.

2– 2.3 LBS / 1000 SF OF KENTUCKY 31 TALL FESCUE (100 LBS / ACRE)

IN THE MANNER DESCRIBED ABOVE IN PARTS 1, 2 AND 3.

APPLY NURSE CROP AS FOLLOWS:

MAY 1 – AUG 15 – 10 LBS / AC GERMAN MILLET OR
– 15 LBS / AC SUNDANGRASS
AUG 15 – MAY 1 – 40 LBS / AC RYE (GRAIN)

B. SEEDING DATES: KY.31 TALL FESCUE

(BELOW 2500’ ELEV)
AUG 20 – SEPT 15
MARCH 1 – MAY 1

(ABOVE 2500’ ELEV)
JULY 15 – AUG 30
MARCH 5 – MAY 15

C. MULCHING

APPLY 4000 LB / AC OF GRAIN STRAW SUITABLY TACKED DOWN. ADD NETTING TO STEEP SLOPES AND STAPLE PER MANUFACTURERS RECOMMENDATIONS

III. SOIL PREPARATION

A. GENERAL REQUIREMENTS

1–PREPARATION FOR PRIMARY/PERMANENT STABILIZATION SHALL NOT BEGIN UNTIL ALL CONSTRUCTION AND UTILITY WORK WITHIN THE PREPARATION AREA IS COMPLETE. HOWEVER, IT MAY BE NECESSARY TO PREPARE FOR NURSE CROPS PRIOR TO COMPLETION OF CONSTRUCTION AND INSTALLATION OF UTILITIES.

2–A NORTH CAROLINA DEPARTMENT OF AGRICULTURE SOILS TEST (OR EQUAL) SHALL BE OBTAINED FOR ALL AREAS TO BE SEEDED, SPRIGGED, SODDED OR PLANTED. RECOMMENDED FERTILIZER AND pH ADJUSTING PRODUCTS SHALL BE INCORPORATED INTO THE PREPARED AREAS AND BACKFILL MATERIAL PER THE TEST.

3–ALL AREAS TO BE SEEDED OR PLATED SHALL BE TILLED OR RIPPED TO A DEPTH OF 4”. RIPPING CONSISTS OF CREATING FISSURES IN A CRISS–CROSS PATTERN OVER THE ENTIRE SURFACE AREA USING AN IMPLEMENT THAT WILL NOT GLAZE THE SIDE WALLS OF THE FISSURES. SITE PREPARATION THAT DOES NOT COMPLY WITH THESE DOCUMENTS SHALL NOT BE ACCEPTABLE. THE DEPTH OF SOIL PREPARATION MAY BE ESTABLISHED AS A RANGE BASED ON THE APPROVAL OF THE REVIEW AGENCY. ONCE TILLED OR RIPPED ACCORDING TO THE APPROVED PLAN, ALL AREAS ARE TO BE RETURNED TO FINAL GRADE. pH MODIFIERS AND/OR OTHER SOIL AMENDMENTS SPECIFIED IN THE SOIL TESTS CAN BE ADDED DURING THE SOIL PREPARATION PROCEDURE OR AS DESCRIBED BELOW.

4–ALL STONES LARGER THAN 3” ON ANY SIDE, STICKS, ROOTS, AND OTHER EXTRANEEOUS MATERIALS THAT SURFACE DURING THE BED PREPARATION SHALL BE REMOVED.

B. AREAS TO BE SEEDED

1–TILL OR DISC THE PREPARED AREAS TO BE SEEDED TO A MINIMUM DEPTH OF 4”. REMOVE STONES LARGER THAN 3” ON ANY SIDE, STICKS, ROOTS, AND OTHER EXTRANEEOUS MATERIALS THAT SURFACE. IF NOT INCORPORATED IN THE RIPPING PROCESS, ADD pH MODIFIERS AND FERTILIZERS AT THE RATE SPECIFIED.

2–RECOMPACT THE AREA UTILIZING A CULTIPACKER ROLLER. THE FINISHED GRADE SHALL BE SMOOTH EVEN SOIL SURFACE WITH LOOSE, UNIFORMLY FINE TEXTURE. ALL RIDGES AND DEPRESSIONS SHALL BE REMOVED AND FILLED TO PROVIDE THE APPROVED SURFACE DRAINAGE. SEEDING THE GRADED AREAS IS TO BE DONE IMMEDIATELY AFTER FINISHED GRADES ARE OBTAINED AND SEEDBED PREPARATION IS COMPLETE.

C. AREAS TO BE SPRIGGED, SODDED, AND/OR PLANTED

1–AT THE TIME OF PLANTING, TILL OR DISC THE PREPARED AREA TO A DEPTH OF 4”–6” BELOW THE APPROVED FINISHED GRADE. REMOVE ALL STONES LARGER THAN 3” ON ANY SIDE, STICKS, ROOTS AND OTHER EXTRANEEOUS MATERIALS THAT SURFACE. IF NOT INCORPORATED DURING THE RIPPING PROCESS, ADD pH MODIFIERS, FERTILIZER AND OTHER RECOMMENDED SOIL AMENDMENTS.

2–RECOMPACT THE AREA UTILIZING A CULTIPACKER ROLLER AND PREPARE FINAL GRADES AND DESCRIBED ABOVE. INSTALL SPRIGS, SOD AND PLANTS AS DIRECTED IMMEDIATELY AFTER FINE GRADING IS COMPLETE. MULCH, MAT AND/OR TACK AS SPECIFIED.

IV. CLOSEOUT

1–REFER TO NCG01 REQUIREMENTS AND CONSTRUCTION SEQUENCE FOR GROUND STABILIZATION TIMEFRAMES.

2–CONTRACTOR RESPONSIBLE FOR ESTABLISHING GROUND COVER PRIOR TO CLOSE OUT OF EROSION CONTROL PERMIT OR ACCEPTANCE BY OWNER. GROUND COVER WILL BE CONSIDERED ESTABLISHED WHEN ALL EXPOSED SOILS HAVE BEEN STABILIZED WITH A PERMANENT PERENNIAL VEGETATIVE COVER WITH A DENSITY OF 80% WITH NO CONTIGUOUS BARE AREAS GREATER THAN ONE SQUARE YARD. VEGETATION DENSITY SHALL BE DETERMINED BY THE ENGINEER OR EROSION CONTROL INSPECTOR.

3–MULTIPLE SEEDING EFFORTS BY THE CONTRACTOR MAY BE REQUIRED FOR PORTIONS OF OR THE ENTIRE SITE TO ESTABLISH SUITABLE GROUND COVER.

GENERAL CONSTRUCTION NOTES

1. ALL WORK AND CONSTRUCTION ACTIVITIES ON THE PROJECT SITE SHALL COMPLY WITH ALL APPLICABLE OSHA REGULATIONS AND REQUIREMENTS. IT IS THE CONTRACTOR’S RESPONSIBILITY TO MAINTAIN A SAFE WORK SITE.

2. THE ENGINEER AND OWNER RESERVE THE RIGHT TO MODIFY PROJECT WORK ITEMS (INCLUDING GRADING) AS DEEMED NECESSARY FOR THE SUCCESSFUL COMPLETION OF THE PROJECT. THE CONTRACTOR MAY SUGGEST ADJUSTMENTS TO GRADING OR OTHER WORK ITEMS TO BE APPROVED BY THE ENGINEER OR OWNER.

3. THE CONTRACTOR SHALL COMPLY WITH THE GEOTECHNICAL REPORT FOR THE PLACEMENT OF FILL AND COMPACTION REQUIREMENTS. IF NO REPORT IS AVAILABLE, THE FOLLOWING MINIMUM STANDARDS SHALL APPLY:

PLACEMENT OF FILL:

- A. PLACE THE MATERIAL IN SUCCESSIVE HORIZONTAL LAYERS NOT EXCEEDING 8” FOR THE FULL WIDTH OF THE CROSS SECTION.
- B. FILL SHALL BE PLACED ONLY WHEN IT IS WITHIN 3% OF ITS OPTIMUM MOISTURE CONTENT AS DETERMINED BY A STANDARD PROCTOR ASTM D 698.
- C. EACH LAYER OF FILL SHALL BE SPREAD EVENLY AND SHALL BE COMPACTED TO ITS SPECIFIED DENSITY AS DETERMINED BY STANDARD PROCTOR ASTM D 698 BEFORE NEW LAYERS ARE PLACED AND COMPACTED.
- D. SLOPED GROUND SURFACES STEEPER THAN ONE VERTICAL TO FOUR HORIZONTAL, ON WHICH FILL IS TO BE PLACED, SHALL BE STEPPED OR BENCHED SUCH THAT FILL MATERIAL WILL BOND TO THE EXISTING SURFACES.
- E. EMBANKMENT SLOPES SHALL BE CONSTRUCTED BY FILLING ONE (1) FOOT BEYOND THE PROPOSED FINISHED SLOPE SURFACE FOR EACH LIFT. COMPACTION EQUIPMENT SHALL WORK TO THE EDGE OF EACH LIFT. AFTER THE ENTIRE FILL IS PLACED AND COMPACTED, THE OUTSIDE FOOT OF THE SLOPE SHALL BE TRIMMED TO THE DESIGN SLOPE WITH A DOZER. UNLESS INDICATED ON THE DRAWINGS, NO FILL SLOPES SHALL BE STEEPER THAN 2 HORIZONTAL TO 1 VERTICAL.

COMPACTION:

- A. STRUCTURAL FILL UNDER BUILDINGS AND WITHIN 10’ OF BUILDING PERIMETER, 100% OF STANDARD PROCTOR THE ENTIRE DEPTH OF FILL.
- B. UNDER WALKS, DRIVES, PADS, AND PAVED AREAS: 95% OF STANDARD PROCTOR EXCEPT 100% OF STANDARD PROCTOR IN THE UPPER 2’.
- C. UNDER LAWNS AND PLANTING AREAS BEYOND 10’ FROM BUILDING: 95% OF STANDARD PROCTOR.
- D. BACKFILL IN TRENCHES: COMPLY WITH COMPACTION REQUIREMENTS FOR THE AREA THROUGH WHICH THE TRENCH RUNS.
- 4. ALL EROSION CONTROL DEVICES SUCH AS SILT FENCES, DIVERSIONS, SEDIMENT TRAPS, ETC. SHALL BE MAINTAINED IN WORKABLE CONDITIONS FOR THE LIFE OF THE PROJECT AND SHALL BE REMOVED AT THE COMPLETION OF THE PROJECT ONLY WITH THE ENGINEER’S APPROVAL. SEE THE NPDES REQUIREMENTS ON THIS PLAN SHEET FOR MORE DETAIL. IF DURING THE LIFE OF THE PROJECT A STORM CAUSES SOIL EROSION WHICH CHANGES THE FINISHED GRADES OR CREATES "GULLIES" AND "WASHED AREAS", THESE SHALL BE REPAIRED BY THE CONTRACTOR AT NO EXTRA COST. THE CONTRACTOR SHALL ADHERE TO THE APPROVED EROSION CONTROL PLAN AND TAKE ANY ADDITIONAL MEASURES NECESSARY TO PREVENT SEDIMENT FROM LEAVING THE SITE.

- 4. DISPOSABLE MATERIALS:
 - A. CLEARING AND GRUBBING WASTES SHALL BE REMOVED FROM THE SITE AND PROPERLY DISPOSED OF BY THE CONTRACTOR AT THEIR EXPENSE, UNLESS OTHERWISE SPECIFIED.
 - B. SOLID WASTES TO BE REMOVED SUCH AS SIDEWALKS, CURBS, PAVEMENT, ETC. MAY BE PLACED IN SPECIFIED DISPOSAL AREAS IF PERMITTED BY THE APPROPRIATE AGENCIES AND APPROVED BY THE OWNER. THIS MATERIAL SHALL BE SPREAD AND MIXED WITH DIRT ELIMINATING ALL VOIDS. THIS MATERIAL SHALL HAVE A MINIMUM COVER OF 2’. THE CONTRACTOR SHALL MAINTAIN SPECIFIED COMPACTION REQUIREMENTS IN THESE AREAS. WHEN DISPOSAL SITES ARE NOT PROVIDED, THE CONTRACTOR SHALL REMOVE THIS WASTE FROM THE SITE AND PROPERLY DISPOSE OF IT AT THEIR EXPENSE.
 - C. ABANDONED UTILITIES SUCH AS CULVERTS, WATER PIPE, HYDRANTS, CASTING, PIPE APPURTENANCES, UTILITY POLES, ETC. SHALL BE THE PROPERTY OF THE SPECIFIED UTILITY AGENCY OR COMPANY HAVING JURISDICTION. BEFORE THE CONTRACTOR CAN REMOVE, DESTROY, SALVAGE, RE–USE, SELL OR STORE FOR THEIR OWN USE ANY ABANDONED UTILITY, THEY MUST PRESENT TO THE OWNER WRITTEN PERMISSION FROM THE UTILITY INVOLVED.
 - D. UNLESS OTHERWISE NOTED ON THE PLANS, BURNING WILL NOT BE ALLOWED ON THIS PROJECT. SHOULD BURNING BE ALLOWED BY THE OWNER, IT IS THE CONTRACTOR’S RESPONSIBILITY TO OBTAIN ALL NECESSARY PERMITS (AT THEIR EXPENSE) AND FOLLOW ALL APPLICABLE RULES AND REGULATIONS.
- 6. UNLESS OTHERWISE SPECIFIED, ALL BASE, PAVING, CURBING AND OTHER CONCRETE WORK SHALL CONFORM TO THE LOCAL MUNICIPALITY OR NCDOT SPECIFICATIONS FOR CONSTRUCTION. ALL WATER AND SEWER CONSTRUCTION SHALL CONFORM TO THE LOCAL UTILITY REQUIREMENTS AND/OR THE NCDENR MINIMUM STANDARDS.
- 7. IN THE EVENT EXCESSIVE GROUND WATER OR SPRINGS ARE ENCOUNTERED WITHIN THE LIMITS OF CONSTRUCTION, THE CONTRACTOR SHALL INSTALL NECESSARY UNDERDRAINS AND STONE AS DIRECTED BY THE ENGINEER. ALL WORK SHALL BE PAID BASED UPON THE UNIT PRICES UNLESS OTHERWISE SPECIFIED.
- 8. THE CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF ADJUSTMENT OF ALL UTILITY SURFACE ACCESSSES (INCLUDING MANHOLE COVERS, VALVE BOXES, ETC.) WHETHER HE PERFORMS THE WORK OR THE UTILITY COMPANY PERFORMS THE WORK.
- 9. THE CONTRACTOR SHALL CONTROL ALL "DUST" BY PERIODIC WATERING AND SHALL PROVIDE ACCESS AT ALL TIMES FOR PROPERTY OWNERS WITHIN THE PROJECT AND FOR EMERGENCY VEHICLES. ALL OPEN DITCHES AND HAZARDOUS AREAS SHALL BE CLEARLY MARKED IN ACCORDANCE WITH OSHA REGULATIONS.

10. ALL AREAS OF EXPOSED SOIL SHALL BE SEEDED, FERTILIZED AND MULCHED ACCORDING TO THE SPECIFICATIONS. THE FINISHED SURFACE SHALL BE TO GRADE AND SMOOTH, FREE OF ALL ROCKS LARGER THAN 3”, EQUIPMENT TRACKS, DIRT CLOUDS, BUMPS, RIDGES, AND GOUGES PRIOR TO SEEDING. THE SURFACE SHALL BE LOOSENED TO A DEPTH OF 1”+/- TO ACCEPT SEED. THE CONTRACTOR SHALL NOT PROCEED WITH SEEDING OPERATIONS WITHOUT FIRST OBTAINING THE ENGINEER’S APPROVAL OF THE GRADED SURFACE. ALL SEEDING SHALL BE PERFORMED BY A MECHANICAL "HYDRO–SEEDER". THE ENGINEER PRIOR TO SEEDING MUST APPROVE HAND SEEDING ON ANY AREA.


11. GRADED SLOPES AND FILLS SHALL BE PROTECTED WITH ROLLED EROSION CONTROL PRODUCT IF COMPLETED OUTSIDE OF OPTIMUM GERMINATION SEASON WHEN UNFAVORABLE WEATHER CONDITIONS PREVENT ESTABLISHMENT OF VEGETATIVE GROUND COVER.

GENERAL CONSTRUCTION NOTES

12–20–2022

NOT TO SCALE


3.28

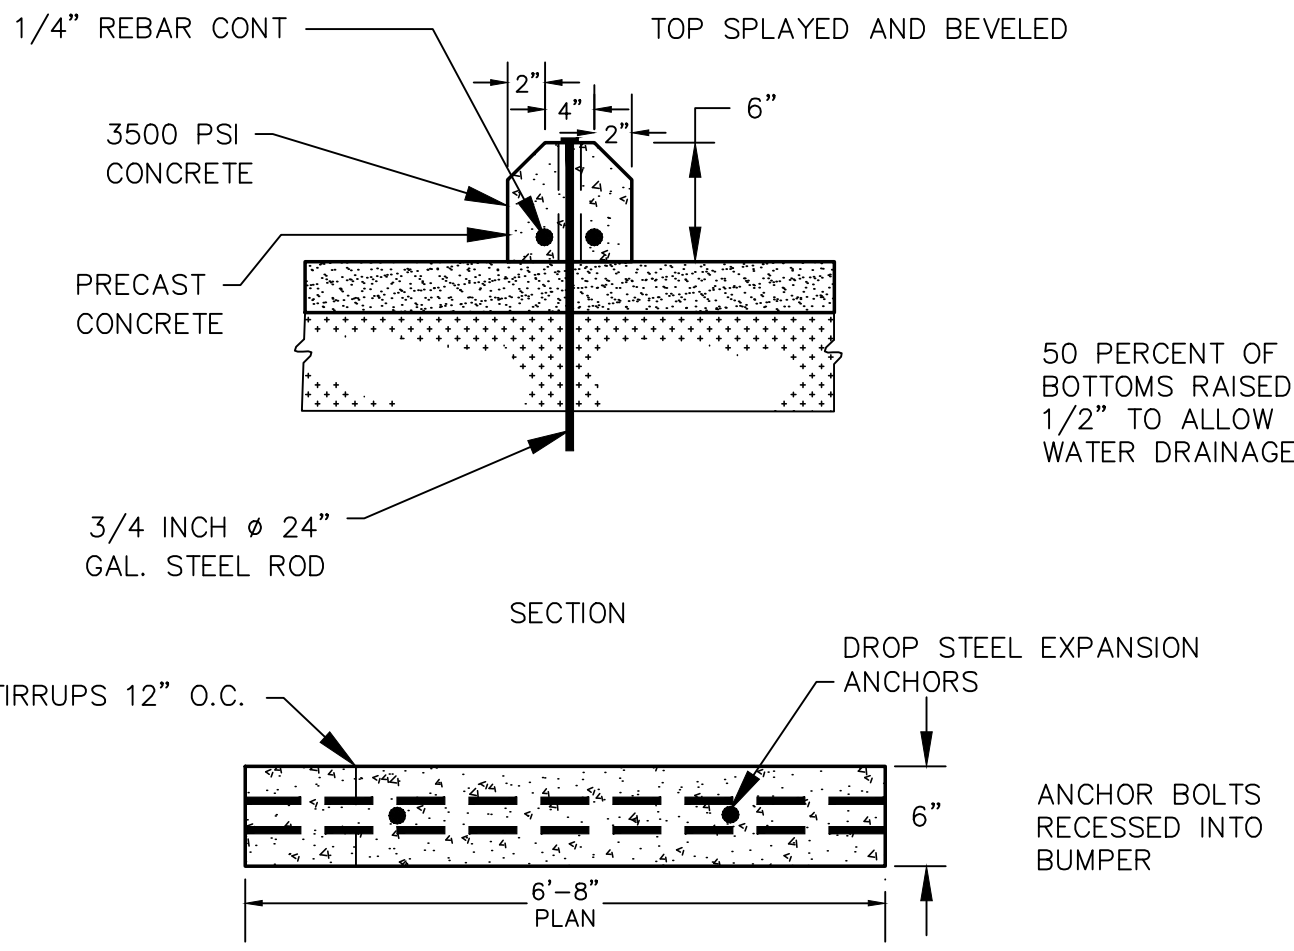

WHEEL STOP

1–5–23

NOT TO SCALE

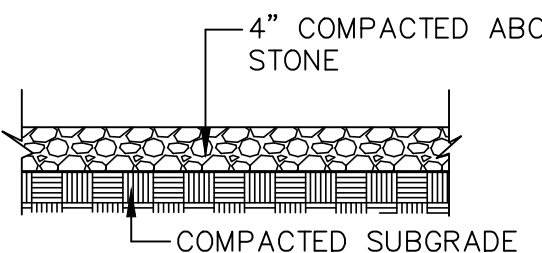

GRAVEL PAVEMENT

06–04–26


NOT TO SCALE

WGLA
Engineering

WGLA ENGINEERING, PLLC
724 5th AVENUE WEST
HENDERSONVILLE, NC 28739
(828) 687-7177
WGLA.COM
NC LICENSE P-1342

PINE STREET
PARKING LOT

HENDERSONVILLE
HENDERSON COUNTY
NORTH CAROLINA

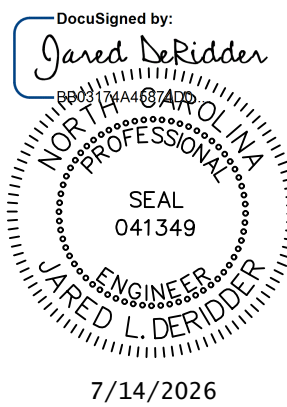

REVISIONS

DATE	DESCRIPTION



Know what's below.
Call before you dig.

PROJECT NUMBER: 25184
DATE: 7-14-26

SITE DETAILS

C-700

SCALE: AS NOTED

11–15–23

NOT TO SCALE

3.10